


LTR	DATE	BY	CHK'D	REVISION
A	6/15/84	REL	RSG	① WAS FOR POSITIVE GROUND REVERSE MOTOR LEAD CONNECTIONS ON RD-5-3690-0, RD-5-3690-24, RD-5-3757-12, & RD-5-3757-24; DELETED RD-5-4631-0; RD-3-1400-30-RED, RD-3-1400-30-YEL, RD-3-1799-6, & RD-3-3176-24-RED WERE RD-3-3028-30-RED, RD-3-3028-30-YEL, RD-3-3029-0, & RD-3-3009-24-RED

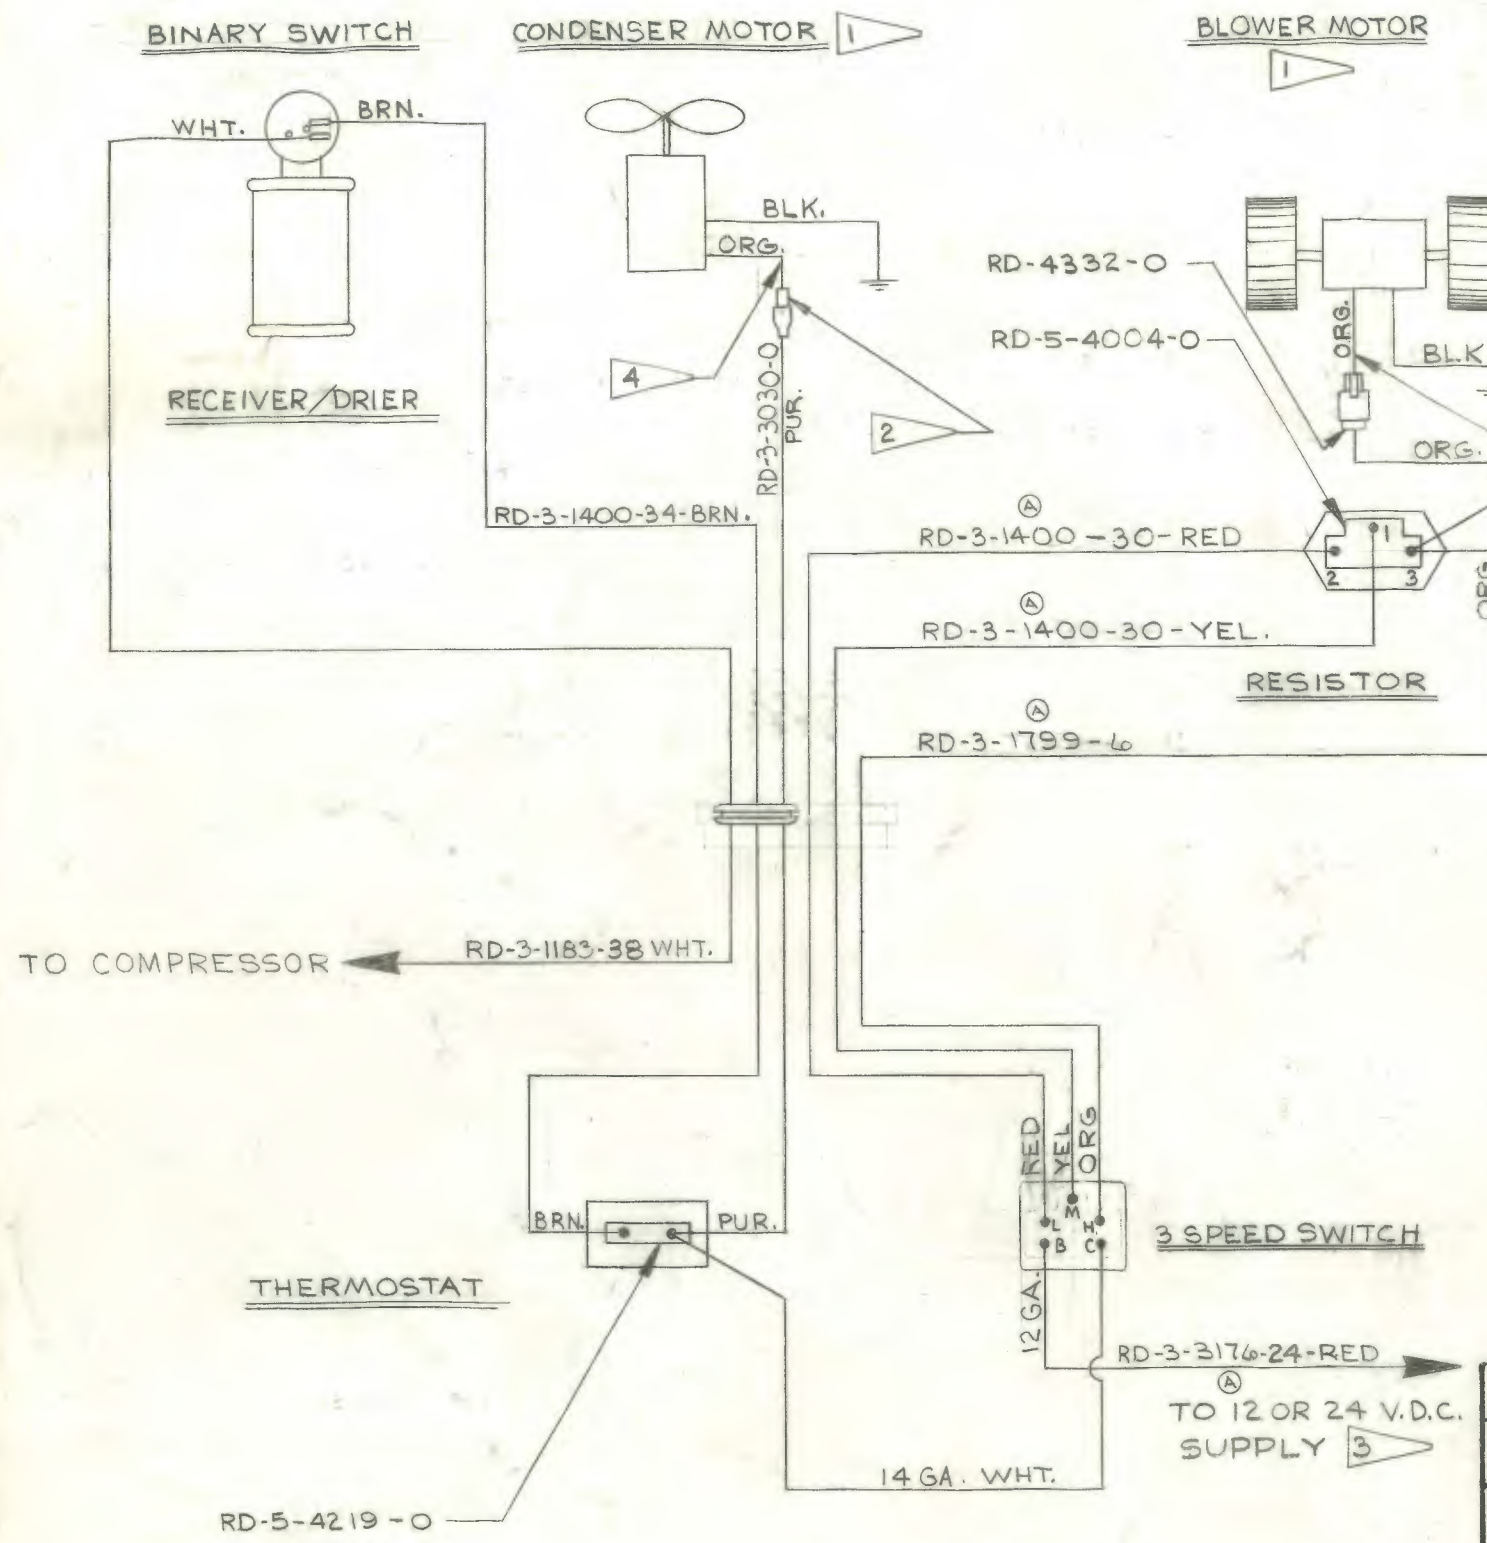

- 1) ALL WIRING 16 GA. UNLESS OTHERWISE NOTED.
- ⑤ 6.00 ORG MOTOR WIRE
- ④ 4.00 ORG MOTOR WIRE
- ③ USE 15 AMP. FUSE OR BREAKER FOR 24V. SYSTEM (CUSTOMER SUPPLIED). USE 30 AMP FUSE OR BREAKER FOR 12 V. SYSTEM (CUSTOMER SUPPLIED).
- ② RD-5-3979-0, 1/4 MALE CONNECTOR.
- ① FOR POSITIVE GROUND REVERSE MOTOR LEAD CONNECTIONS ON RD-5-5120-0, RD-5-5120-24, RD-5-3757-12 & RD-5-3757-24

NOTE:

ITEM	MFG.	PART NO.	DESCRIPTION	MAT'L	FINISH
DWN	J. NOVAK	8-2-83	SCALE NONE		
CKD	S. MOREHOUSE	8-5-83	TOLERANCES: .0 = + EXCEPT AS NOTED .00 = + N/A LINEAR .000 = + .0000 = + ANGULAR = ±		
PROD. APPR.	S. MOREHOUSE	6-5-83			
<b>RED DOT CORPORATION</b> 495 ANDOVER PARK EAST SEATTLE, WA 98188			THIS PRINT IS LOANED SUBJECT TO RETURN UPON DEMAND AND IS NOT TO BE USED DIRECTLY OR INDIRECTLY IN ANY WAY DETRIMENTAL TO RED DOT CORPORATION.	NEXT ASSEMBLY CUSTOMER	DWG. NUMBER <b>RD-2-1327</b>
				SHEET 1 OF 1	