



Galaxy™ 4826 Full Dimension Barrier Hose

[Contact us by email](#)

Application:

Our most popular hose, Galaxy 4826 is a polyester-reinforced, spiral barrier hose. It is classified as SAE J2064 TYPE C Class II. Produced to SAE J51 Dimensions.


Construction: CR PA NBR PET NBR PET EPDM

Features:

- Two polyester spiral barrier hose
- J51 A II outside diameters
- Dimensionally stable
- Flexible – easy to route

Compatible with:

- R-12 / R134a refrigerants
- Mineral oil / PAGs

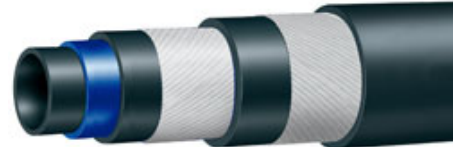

Specifications:

Permeation: 1.77 kg /m² / year

Moisture Ingression: 0.056 g / cm² / yr

Meets SAE J2064 TYPE C Class II

Temperature Range: -40°F to 257° F (-40°C / 125°C)

Dash	Size		Inside Diameter				Outside Diameter				Weight	
			in.		mm		in.		mm			
	in.	mm	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	lbs./ft.	kg/m
-6	5/16	8	0.307	0.337	7.8	8.6	0.719	0.781	18.3	19.8	0.20	0.30
-8	13/32	10	0.401	0.436	10.2	11.1	0.875	0.937	22.2	23.8	0.28	0.42
-10	1/2	13	0.490	0.535	12.4	13.6	0.969	1.031	24.6	26.2	0.33	0.49
-12	5/8	16	0.615	0.660	15.6	16.8	1.094	1.156	27.8	29.4	0.38	0.57

The GOODYEAR (and Winged Foot Design) trademark is used by Veyance Technologies, Inc. under license from The Goodyear Tire & Rubber Company.

Goodyear Engineered Products are manufactured and sourced exclusively by Veyance Technologies, Inc. or its affiliates.

©2011 Veyance Technologies, Inc. All Rights Reserved.